





703Spartan



((RF Wireless Multi-button Intercom



- Digital D.E.C.T wireless intercom system for flats, apartments or shared gate entrances.
- Up to 4 call buttons, each button calling a different handset.
- Working range of 200 yards through concrete (up to 100 yards open field).
- 1 handset per property or apartment.
- Simple setup and install.
- Keypad option for coded access.
- Built in voicemail feature for missed callers, user can listen to messages on handset.
- 2 year manufacturers warranty.









Technical Details			
Power Supply	24v ac/dc (24v 2A dc adaptor included).	Cable Between Speech Unit & Transmitter	4 metre screened CAT5 included.
Current Draw	50mA standby, 1 amp peak.	Max Cable Length	8 metres max.
Relay Outputs	2	Cable Cores	2 x SPK, 2 x MIC, 2 x button, 2 x relay, 2 x power.
Relay Time	Adjustable, 1,3,5,9 secs.	Speech Unit IP Rating	IP55.
Relay Load	Max 2 amps, 24v ac.	Transmitter IP Rating	IP65.
Technology Type	Digital DECT.	Manufacturer Warranty	2 years* (RTB).
Handsets per System	4	Keypad Programming	On the keypad.
Range	Practical working range of 200 metres. 400 metres open field conditions.	Keypad Codes	1200. (Total count of memory locations across 3 separate relays)







703-IMP-KP-2-US





2 button kit with 2 handsets, hooded panel with keypad.

703-HF-IMP-KP-2-US





2 button kit with 2 wall mount monitors, hooded panel with keypad.

703-IMP-KP-3-US





3 button kit with 3 handsets, hooded panel with keypad.

703-HF-IMP-KP-3-US



3 button kit with 3 wall mount monitors, hooded panel with keypad.

703-IMP-KP-4-US



4 button kit with 4 handsets, hooded panel with keypad.

703-HF-IMP-KP-4-US




4 button kit with 4 wall mount monitors, hooded panel with keypad.

Prox panels available*








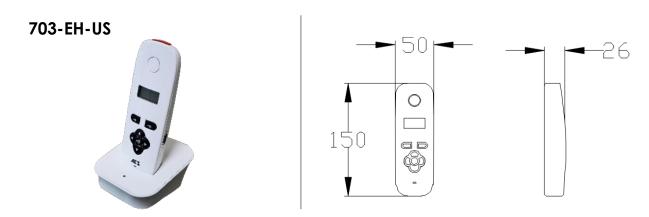

Additional handsets (up to total of 4 max per intercom, which can be a mix and match of both styles.)

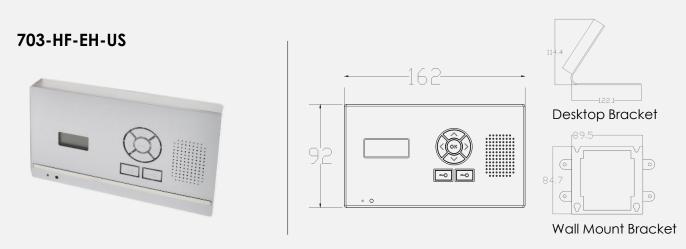

Additional handsets (up to total of 4 max per intercom, which can be a mix and match of both styles.)

703 Call Panel Dimensions PROX/NON PROX

